




Testing Liquid Smart Sensor: Fill small cup supplied, with water or oil. Submerge only the plastic lens (optic sensor) into water or oil, the alarm will activate showing oil present yellow light. Now touch finger to the exposed Stainless Steel Sensor and the white water light will turn on. Place the high water alarm switch at the highest liquid level desired, above the normal OFF level of the pump controller.

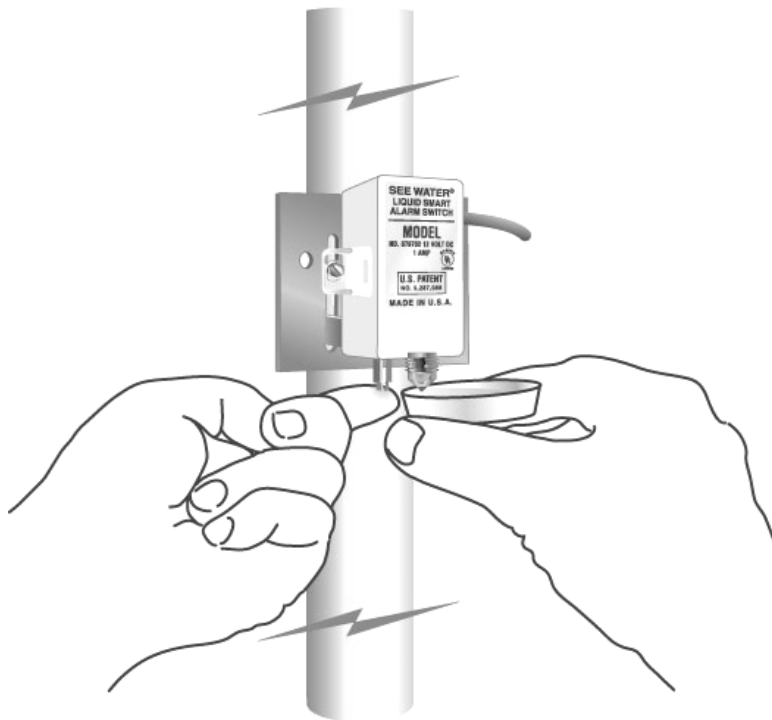

Distributed By:
Stormwaterworks.com, LLC.
48 Union Street
PO Box 2905
Stamford, CT 06906
(203) 324-0045
(203) 324-0075 fax
www.stormwaterworks.com