

Retro-fit catch basin insert

StormPod

Stormwater filtration device

Specifically designed for designated hot spots:

- Parking lots**
- Transportation Centers**
- Gas Stations**
- Industrial Applications**

This economical yet highly effective catch basin insert is designed to filter hydrocarbons from storm water runoff.

The StormPod is available in both round and square configurations with diameters starting at 23" through 30" and square sizes available at 24" through 26".

The StormPod is supplied with a hydrocarbon cartridge as standard. Like the StormBasin, the StormPod can accept the complete range of filter cartridges if required.

Installing the StormPod takes only a few minutes. Lift the grate cover from the catch basin, place the insert on the frame and replace the cover.



StormPod Features

Trash & Debris Deflector

The trash & debris deflector prevents floatables from being released through the bypass ports

Protected Bypass


The protected bypass ports allow the StormPod to function in major rain events by allowing runoff to exit at rates of 1100 gpm

Microshield Open Cell Foam Filter

The open cell foam filter treated with the microbe shield prevents blinding while controlling pathogens and bacteria

Oil Pad

The X-TEX oil pad is the final barrier against hydrocarbon oils and grease holding up to 10 times its own volume

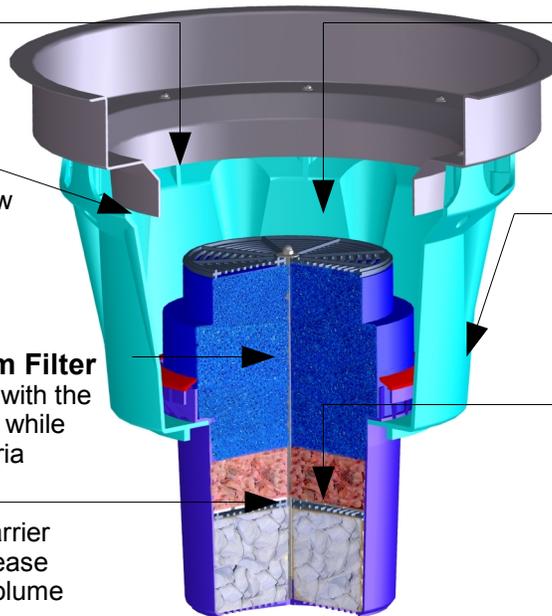

Largest Trash & Debris Capacity in its Class

The StormPod insert can hold up to 1.5 cubic feet of debris, making it the highest capacity product in its class

Molded Plastic Basin

with 0.21" wall thickness for unparalleled strength and durability. The StormPod is designed to be durable and robust and can withstand temperatures ranging from 20°F to 120°F

Fabmax

This extraordinary material is up to 90% effective on hydrocarbons ranging from BTEX to crude oil, sheen, solvents, PCBs, pesticides and organically bound metals

The StormPod is supplied with a standard filter cartridge which is configured to effectively treat a broad spectrum of pollutants commonly associated with surface runoff: sediment/debris, bacteria/pathogens, oils/hydrocarbons, heavy metals. The standard cartridge is ideal for medium traffic volume roadways and small parking fields especially when located near sensitive waterways. For more information on specialized cartridges, visit our website.

Stormwaterworks.com, LLC

48 Union Street, Suite M, Stamford, CT 06906

Phone: 203-324-0045 / Fax: 203-324-0075 / www.stormwaterworks.com